



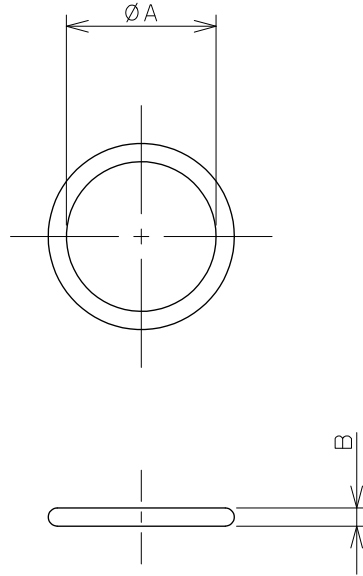

品番	A	B
794-85-3	2.8	1.9
794-85-4	3.8	1.9
794-85-5	4.8	1.9
794-85-6	5.8	1.9
794-85-7	6.8	1.9
794-85-8	7.8	1.9
794-85-9	8.8	1.9
794-85-10	9.8	1.9
794-85-10A	9.8	2.4
794-85-11	10.8	2.4
794-85-11R	10.5	2.7
794-85-11.2	11.0	2.4
794-85-12	11.8	2.4
794-85-12.5	12.3	2.4
794-85-14	13.8	2.4
794-85-15	14.8	2.4
794-85-16	15.8	2.4
794-85-17	17.0	2.0
794-85-18	17.8	2.4
794-85-20	19.8	2.4
794-85-21	20.8	2.4
794-85-22	21.8	2.4
794-85-22A	21.7	3.5
794-85-22.4	22.1	3.5
794-85-24	23.7	3.5
794-85-25	24.7	3.5
794-85-25.5	25.2	3.5
794-85-26	25.7	3.5

品番	A	B
794-85-28	27.7	3.5
794-85-29	28.7	3.5
794-85-29.5	29.2	3.5
794-85-30	29.7	3.5
794-85-31	30.7	3.5
794-85-31.5	31.2	3.5
794-85-32	31.7	3.5
794-85-34	33.7	3.5
794-85-35	34.7	3.5
794-85-35.5	35.2	3.5
794-85-36	35.7	3.5
794-85-38	37.7	3.5
794-85-39	38.7	3.5
794-85-40	39.7	3.5
794-85-41	40.7	3.5
794-85-42	41.7	3.5
794-85-44	43.7	3.5
794-85-45	44.7	3.5
794-85-46	45.7	3.5
794-85-48	47.7	3.5
794-85-48R	47.6	5.7
794-85-49	48.7	3.5
794-85-50	49.7	3.5
794-85-50R	49.6	5.7
794-85-52	51.6	5.7
794-85-53	52.6	5.7
794-85-55	54.6	5.7
794-85-56	55.6	5.7

品番	A	B
794-85-58	57.6	5.7
794-85-60	59.6	5.7
794-85-62	61.6	5.7
794-85-63	62.6	5.7
794-85-65	64.6	5.7
794-85-67	66.6	5.7
794-85-70	69.6	5.7
794-85-71	70.6	5.7
794-85-75	74.6	5.7
794-85-80	79.6	5.7
794-85-85	84.6	5.7
794-85-90	89.6	5.7
794-85-95	94.6	5.7
794-85-100	99.6	5.7
794-85-102	101.6	5.7
794-85-105	104.6	5.7
794-85-110	109.6	5.7
794-85-112	111.6	5.7
794-85-115	114.6	5.7
794-85-120	119.6	5.7
794-85-125	124.6	5.7
794-85-130	129.6	5.7
794-85-132	131.6	5.7
794-85-135	134.6	5.7
794-85-140	139.6	5.7
794-85-145	144.6	5.7
794-85-150	149.6	5.7



単位 mm

尺度 1 / 1

製 図

検 図

承 認

品
番

図中表に記載



KAKUDAI

山本

中本

生嶋

品
名

補修用Oリング

2016年05月25日 作成